

SX1308

Boost Converter



Features

Claimed specification

- Input voltage: 2-24V
- Output voltage: 2-28V, adjustable
- Size: 16mm x 23mm x 14mm
- Max. output current: 2A
- 1.2MHz switching frequency.

Additional information

- Starts working at about 3 V
- 1 - 9mA idle current
- Doesn't come close to 2A output current.
- Output Voltage starts to decrease when the input current comes near 2A.
- Output voltage regulation is not very stable.

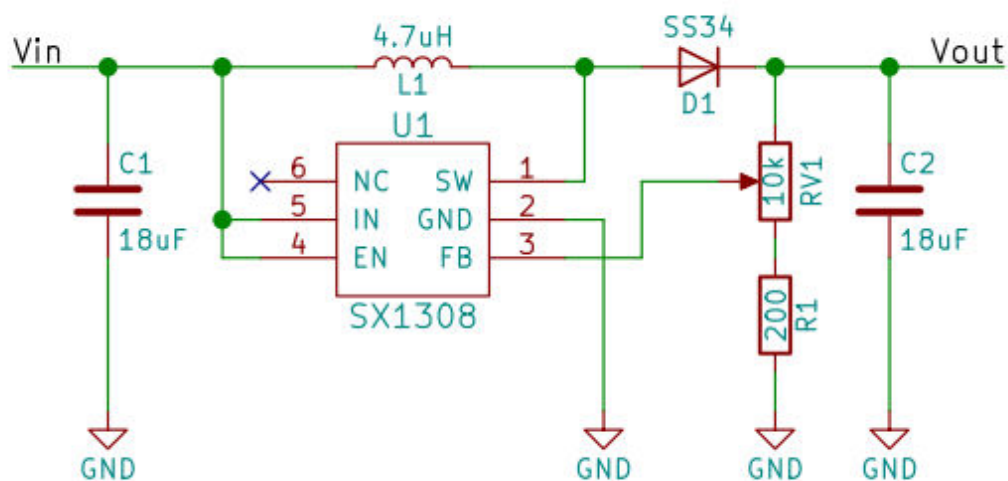
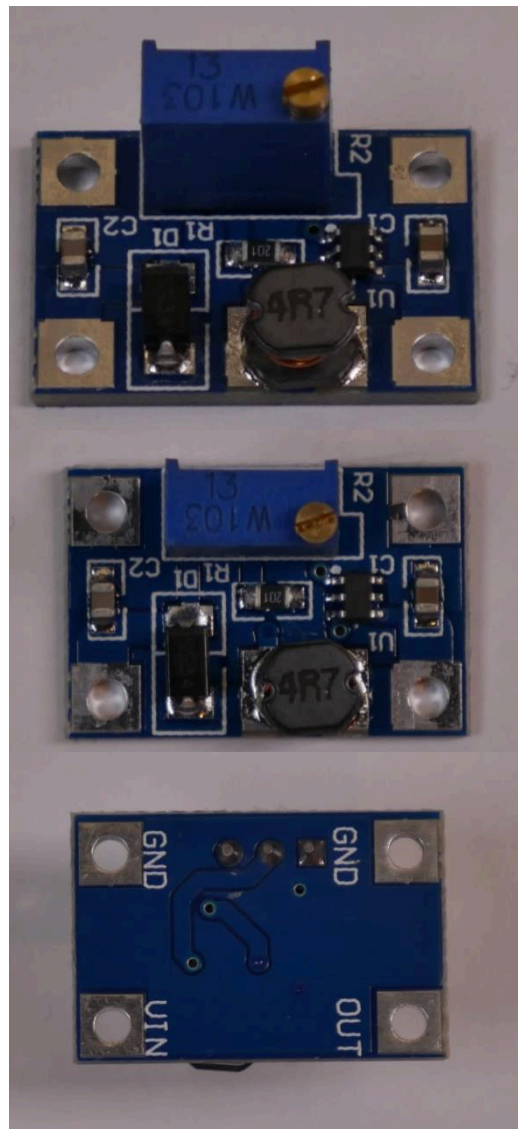


SX1308

Boost Converter

Efficiency



5V Output

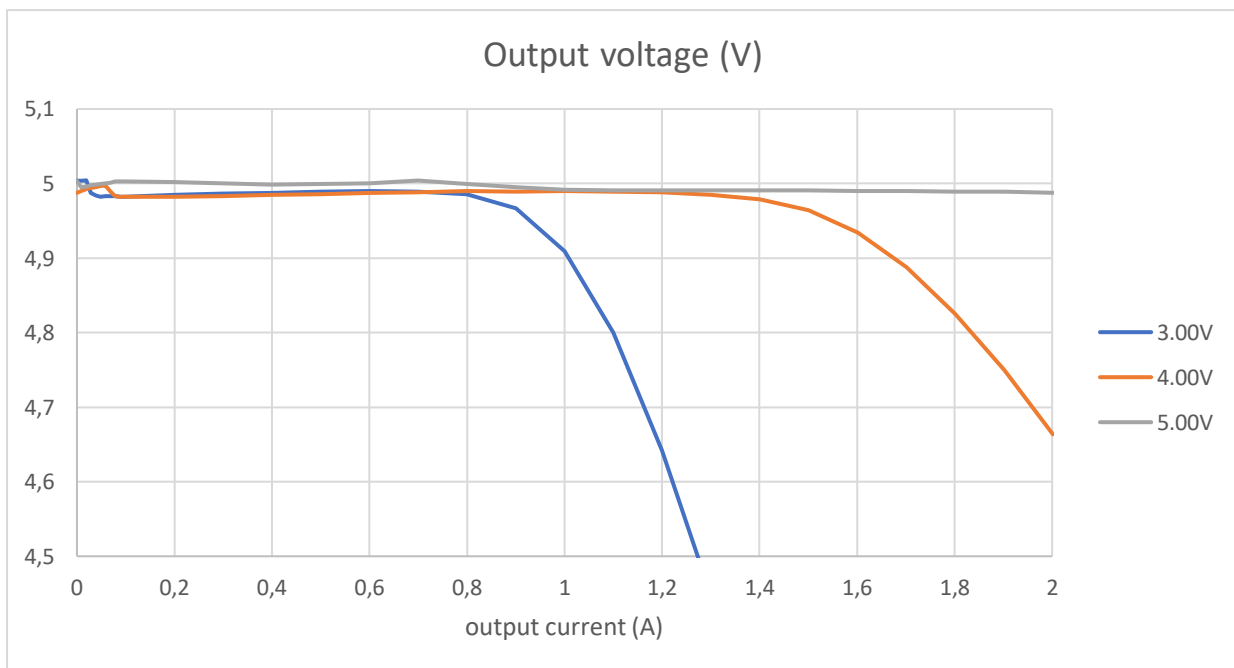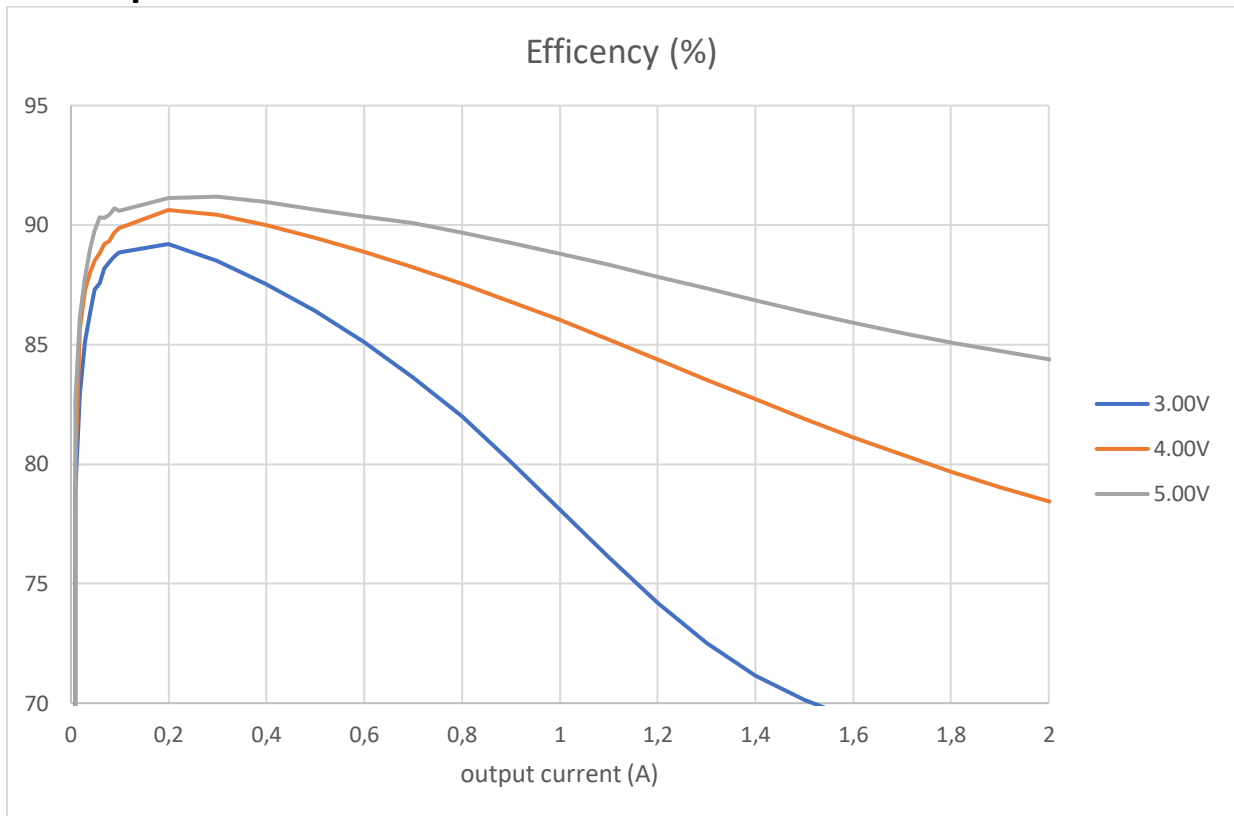

SX1308

Boost Converter



9V Output

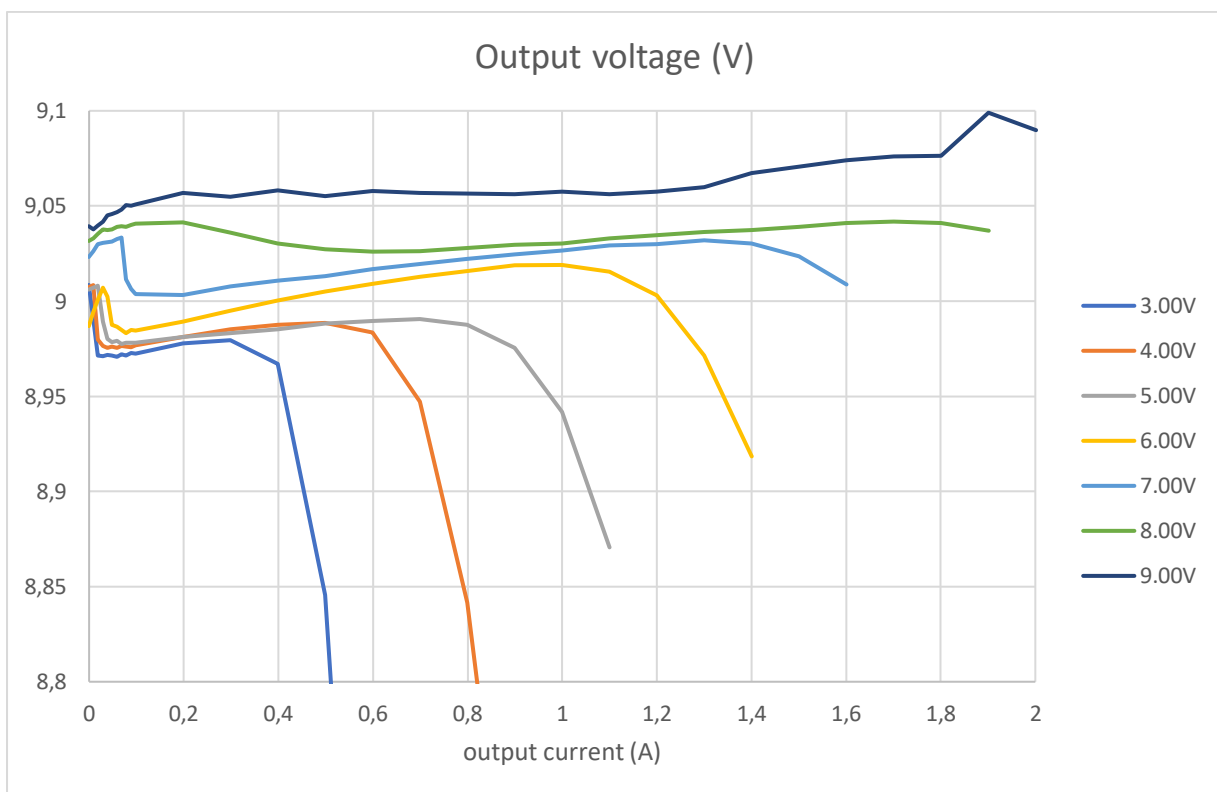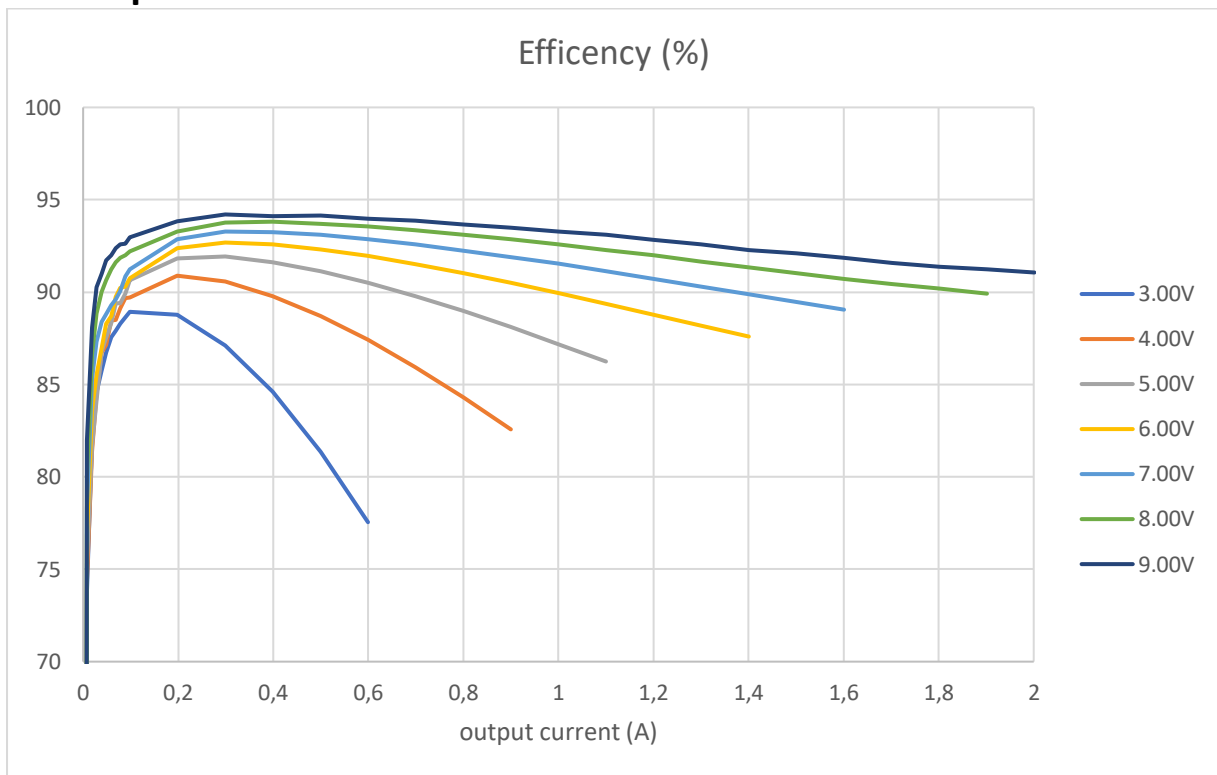

SX1308

Boost Converter



12V Output

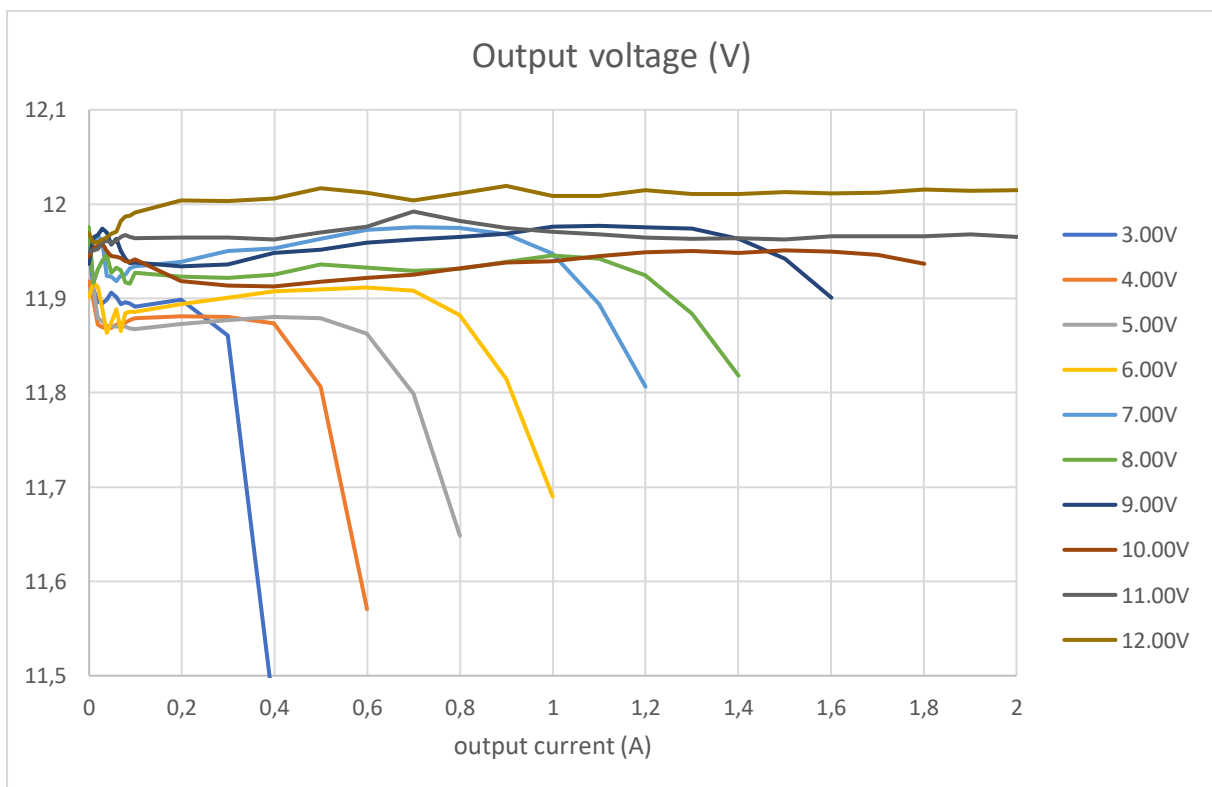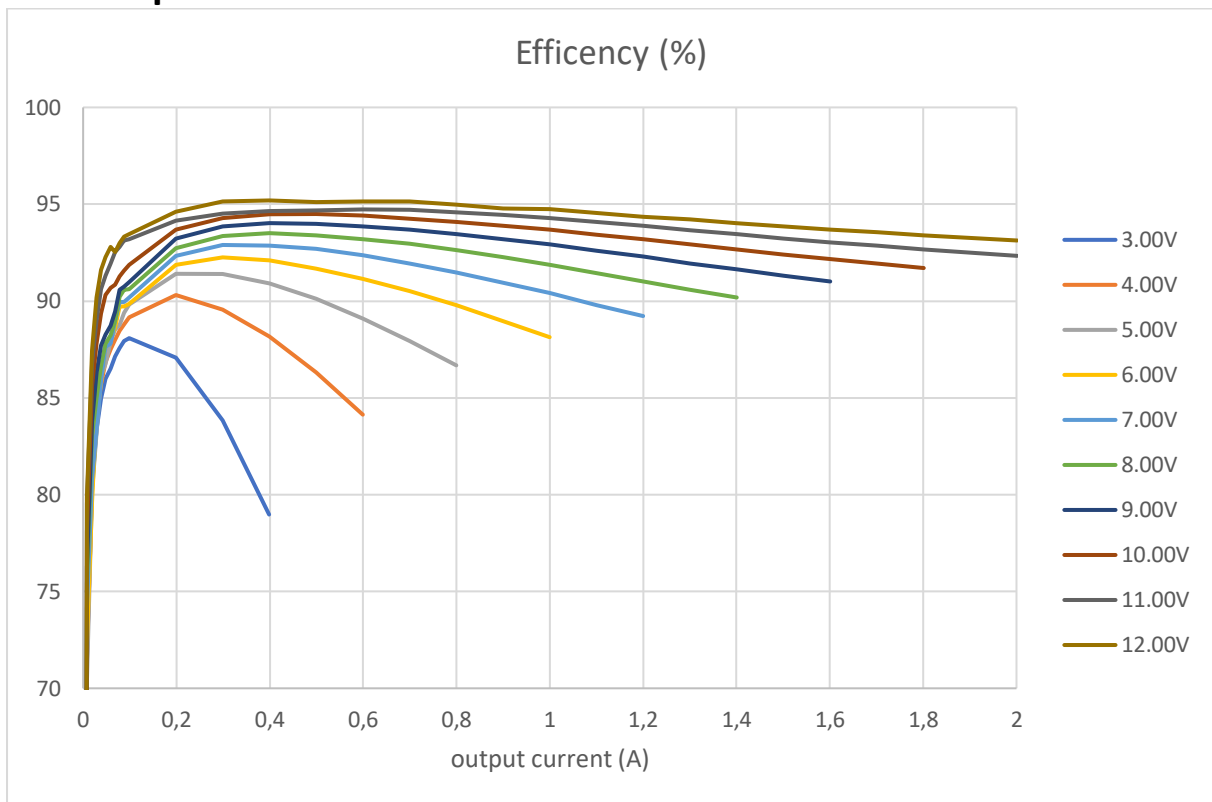

SX1308

Boost Converter

15V Output

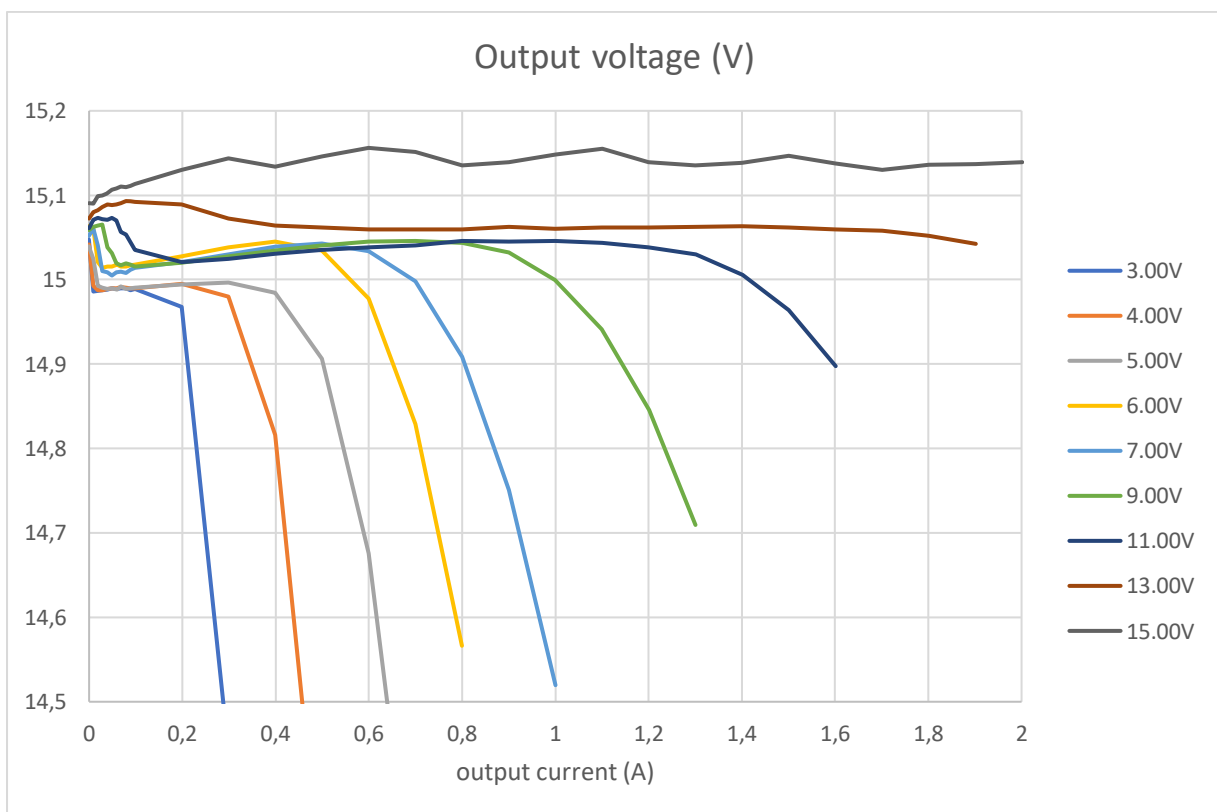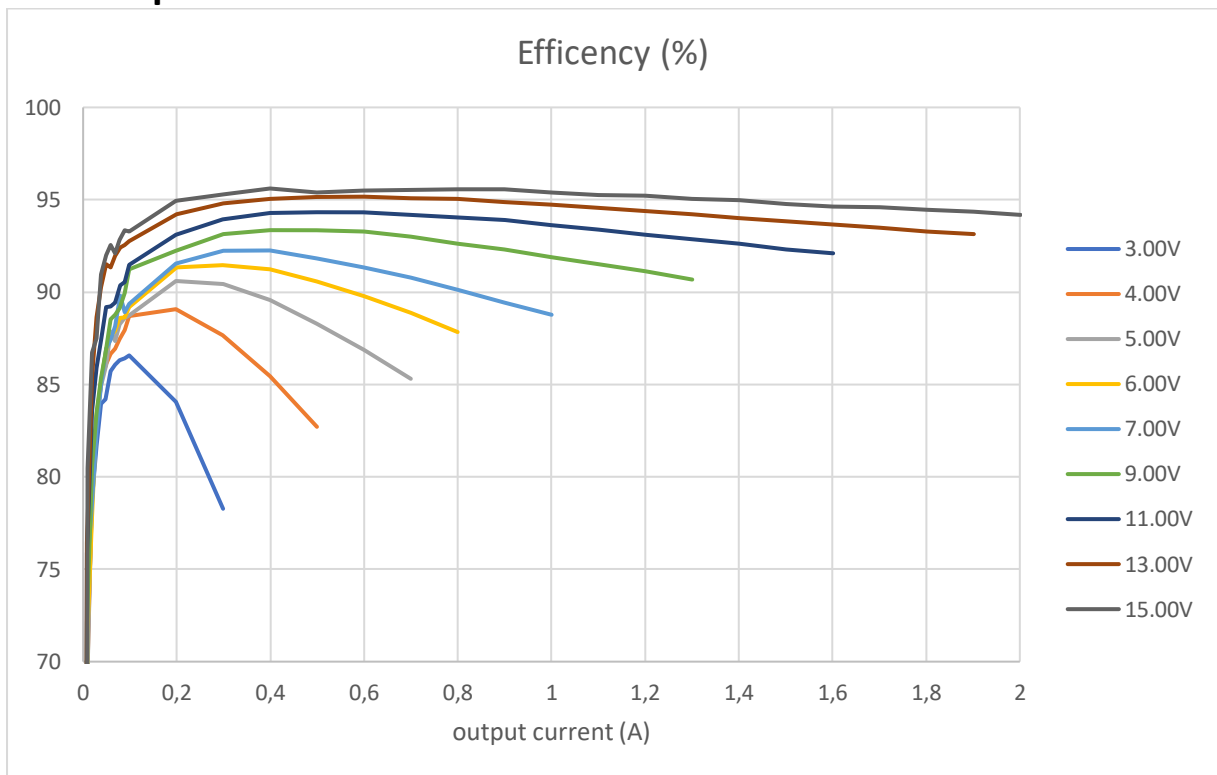

SX1308

Boost Converter

20V Output

