

芯伯乐®  
X I N B O L E

# Product Specification

XBLW LM339


Quad Voltage Comparators

WEB | [www.xinboleic.com](http://www.xinboleic.com)



## Descriptions


The LM339 is a quad voltage integrated comparators, mainly obtained in consumer and industrial electronics products, and designed for use in level detection, low-level sensing. It is available in DIP14/SOP14/TSSOP14 package.

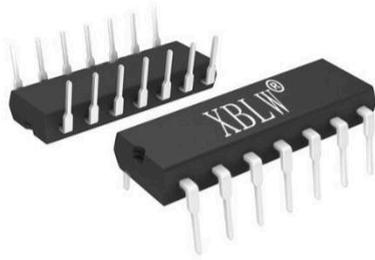

DIP-14



SOP-14

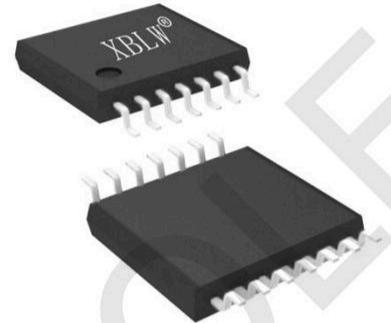

TSSOP-14

## Feature

- Wide Supply Voltage Range  
Single Supplies: 2.0V to 36V  
Dual Supplies:  $\pm 1.0V$  to  $\pm 18V$
- Single or Split Supply Operation
- Low Input Biasing Current: 25 nA (Typ)
- Low Input Offset Current: 5.0 nA (Typ)
- Low Output Saturation Voltage: 130 mV (Typ)
- Output Voltage Compatible With TTL, CMOS Logic Systems


## Applications

- Vacuum robot
- Single phase UPS
- Server PSU
- Cordless power tool
- Wireless infrastructure
- Appliances
- Building automation
- Factory automation & control
- Motor drives
- Infotainment & cluster


## Ordering Information

Product Model	Package Type	Marking	Packing	Packing Qty
XBLW LM339N	DIP-14	LM339N	Tube	1000pcs/Box
XBLW LM339DTR	SOP-14	LM339	Tape	2500pcs/Reel
XBLW LM339TDTR	TSSOP-14	LM339	Tape	3000pcs/Reel

## Schematic Diagram

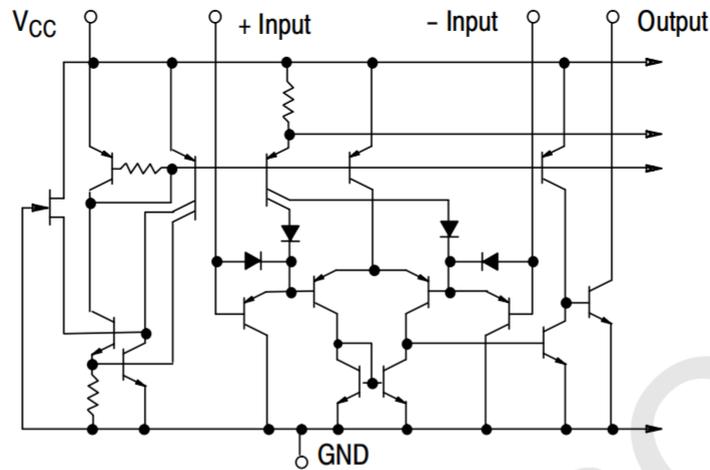

## Pin Diagram

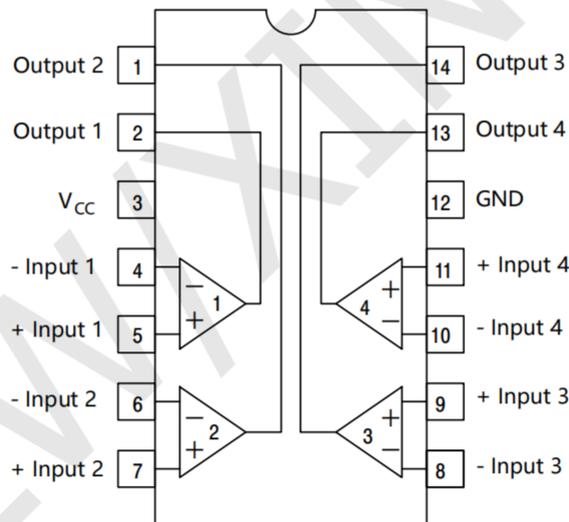

(Top View)

## Pins Configurations

No.	Description	Symbol	No.	Description	Symbol
1	OUTPUT 2	OUT2	8	INVERTING INPUT 3	IN3(-)
2	OUTPUT 1	OUT1	9	NONINVERTING INPUT 3	IN3(+)
3	POWER SUPPLY	Vcc	10	INVERTING INPUT 4	IN4(-)
4	INVERTING INPUT 1	IN1(-)	11	NONINVERTING INPUT 4	IN4(+)
5	NONINVERTING INPUT 1	IN1(+)	12	GROUND	GND
6	INVERTING INPUT 2	IN2(-)	13	OUTPUT 4	OUT4
7	NONINVERTING INPUT 2	IN2(+)	14	OUTPUT 3	OUT3

## Absolute Maximum Ratings

TA=25°C, unless otherwise noted

Parameter	Symbol	Value	Unit
Supply Voltage	V <sub>CC</sub>	36 or ±18	V
Input Differential Voltage Range	V <sub>IDR</sub>	36	V
Input common-mode Voltage Range	V <sub>ICMR</sub>	-0.3 ~ V <sub>CC</sub>	V
Output Current	I <sub>SC</sub>	50	mA
Power Dissipation(Note *)	P <sub>D</sub>	1.0	W
Ambient Temperature	T <sub>amb</sub>	0 ~ 70	°C
Storage Temperature	T <sub>stg</sub>	-65 ~ 150	°C


Note \*: When used above 25°C, the power consumption decreases by 8mW for every 1°C increase.

## Electrical Characteristics


TA=25°C, V<sub>CC</sub>=5V, unless otherwise noted

Characteristics	Test Conditions	Symbol	Value			Unit
			Min.	Typ.	Max.	
Input Offset Voltage	Ta=25°C	V <sub>IO</sub>		2	5	mV
	0°C ≤ Ta ≤ 70°C				9.0	
Input Offset Current	Ta=25°C	I <sub>IO</sub>		5.0	50	nA
	0°C ≤ Ta ≤ 70°C				150	
Input Bias Current	Ta=25°C	I <sub>IB</sub>		25	250	nA
	0°C ≤ Ta ≤ 70°C				400	
Input Common Mode Voltage Range	Ta=25°C	V <sub>ICR</sub>	0		V <sub>CC</sub> -1.5	V
	0°C ≤ Ta ≤ 70°C		0		V <sub>CC</sub> -2.0	
Supply Current	R <sub>L</sub> =∞	I <sub>CC</sub>		0.8	2.0	mA
	R <sub>L</sub> =∞ V <sub>CC</sub> =30V			1.0	2.5	
Voltage Gain	R <sub>L</sub> > 15K, V <sub>CC</sub> =15V	G <sub>V</sub>	50	200		V/mV
Large Signal Response Time	V <sub>IN</sub> =TTL Logic Swing, V <sub>REF</sub> =1.4V, V <sub>RL</sub> =5.0V, R <sub>L</sub> =5.1K	t <sub>RES</sub>		300		ns
Response Time	V <sub>RL</sub> =5.0V, R <sub>L</sub> =5.1K	t <sub>RES</sub>		1.3		us
Input Differential Voltage		V <sub>ID</sub>			V <sub>CC</sub>	V
Output Sink Current	V <sub>IN(-)}</sub> ≥ 1.0V, V <sub>IN(+)}</sub> = 0V, V <sub>O</sub> ≤ 1.5V	I <sub>SINK</sub>	6.0	16		mA
Output Saturation Voltage	V <sub>IN(-)}</sub> ≥ 1.0V, V <sub>IN(+)}</sub> = 0V, I <sub>SINK</sub> ≤ 4.0mA	V <sub>SAT</sub>		130	400	mV
	V <sub>IN(-)}</sub> ≥ 1.0V, V <sub>IN(+)}</sub> = 0V, I <sub>SINK</sub> ≤ 4.0mA, 0°C ≤ Ta ≤ 70°C				700	
Output Leakage Current	V <sub>IN(+)}</sub> ≥ 1.0V, V <sub>IN(-)}</sub> = 0V, V <sub>O</sub> = 5V	I <sub>OL</sub>		0.1		nA
	V <sub>IN(+)}</sub> ≥ 1.0V, V <sub>IN(-)}</sub> = 0V, V <sub>O</sub> = 30V, 0°C ≤ Ta ≤ 70°C				1000	


**Applications**

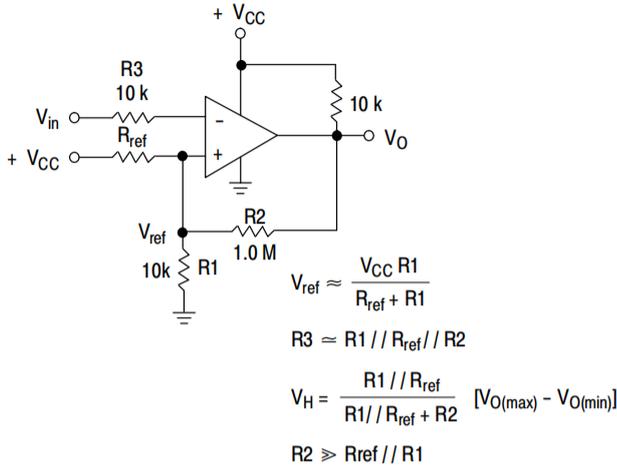

**Figure 1. Inverting Comparator with Hysteresis**

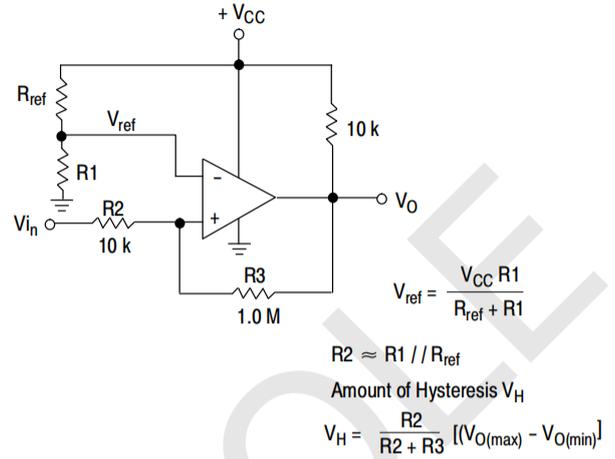


**Figure 2. Noninverting Comparator with Hysteresis**

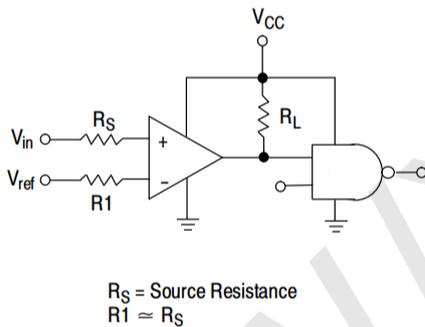


Logic	Device	V <sub>CC</sub> (V)	R <sub>L</sub> kΩ
CMOS	1/4 MC14001	+15	100
TTL	1/4 MC7400	+5.0	10

**Figure 3. Driving Logic**

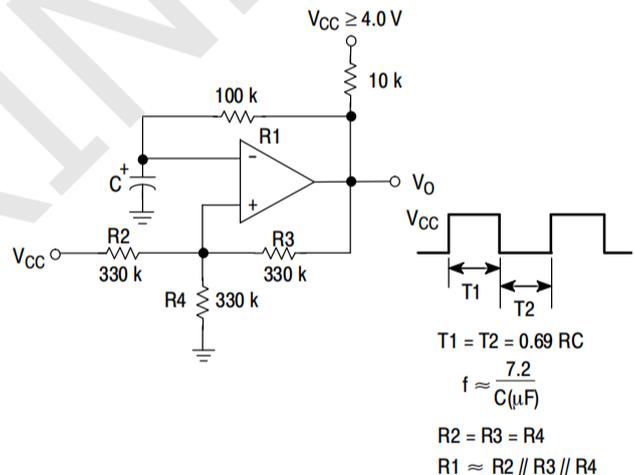

**Figure 4. Squarewave Oscillator**

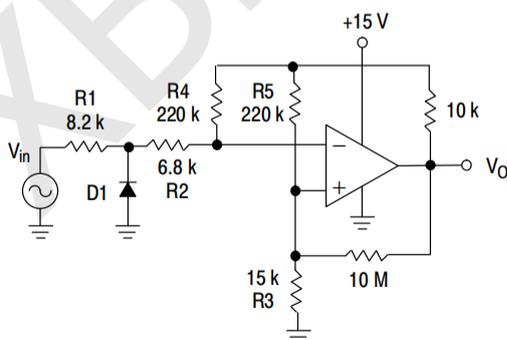


D1 prevents input from going negative by more than 0.6 V.

$R_1 + R_2 = R_3$

$R_3 \leq \frac{R_5}{10}$  for small error in zero crossing

**Figure 5. Zero Crossing Detector (Single Supply)**

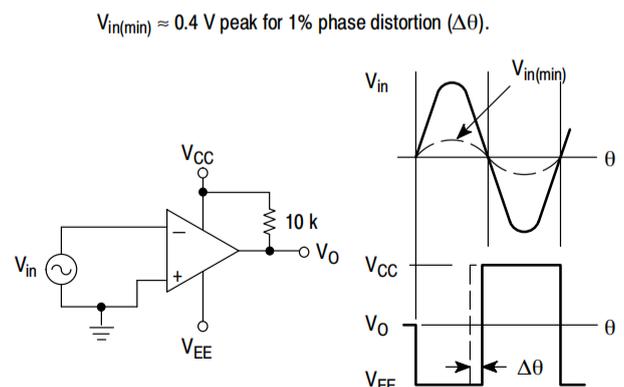

**Figure 6. Zero Crossing Detector (Split Supplies)**

## Typical Characteristics Curves

( $V_{CC} = 15\text{ Vdc}$ ,  $T_A = +25^\circ\text{C}$  (each comparator) unless otherwise noted.)

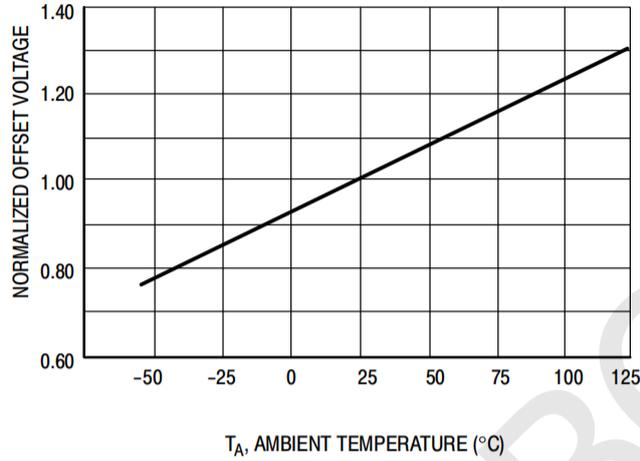


Figure 7. Normalized Input Offset Voltage

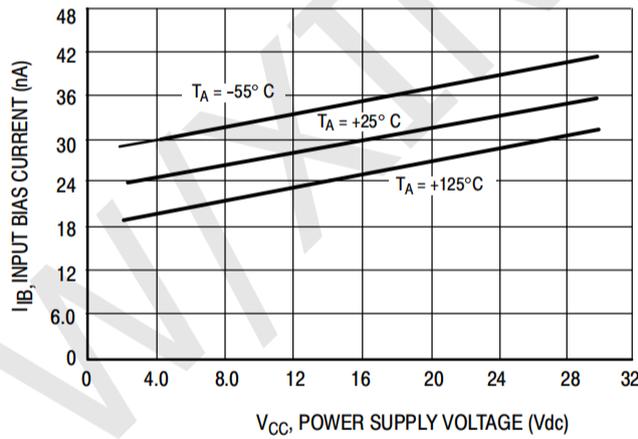


Figure 8. Input Bias Current


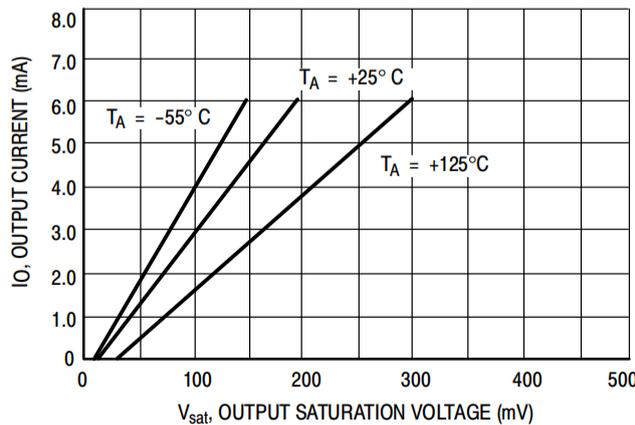


Figure 9. Output Sink Current versus Output Saturation Voltage

**Package Information**


· DIP-14

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Inches	
	Min (mm)	Max (mm)		Min (in)	Max (in)
A	3.710	4.310	A	0.146	0.170
A1	0.510		A1	0.020	
A2	3.200	3.600	A2	0.126	0.142
B	0.380	0.570	B	0.015	0.022
B1	1.524 (BSC)		B1	0.060 (BSC)	
C	0.204	0.360	C	0.008	0.014
D	18.800	19.200	D	0.740	0.756
E	6.200	6.600	E	0.244	0.260
E1	7.320	7.920	E1	0.288	0.312
e	2.540 (BSC)		e	0.100 (BSC)	
L	3.000	3.600	L	0.118	0.142
E2	8.400	9.000	E2	0.331	0.354

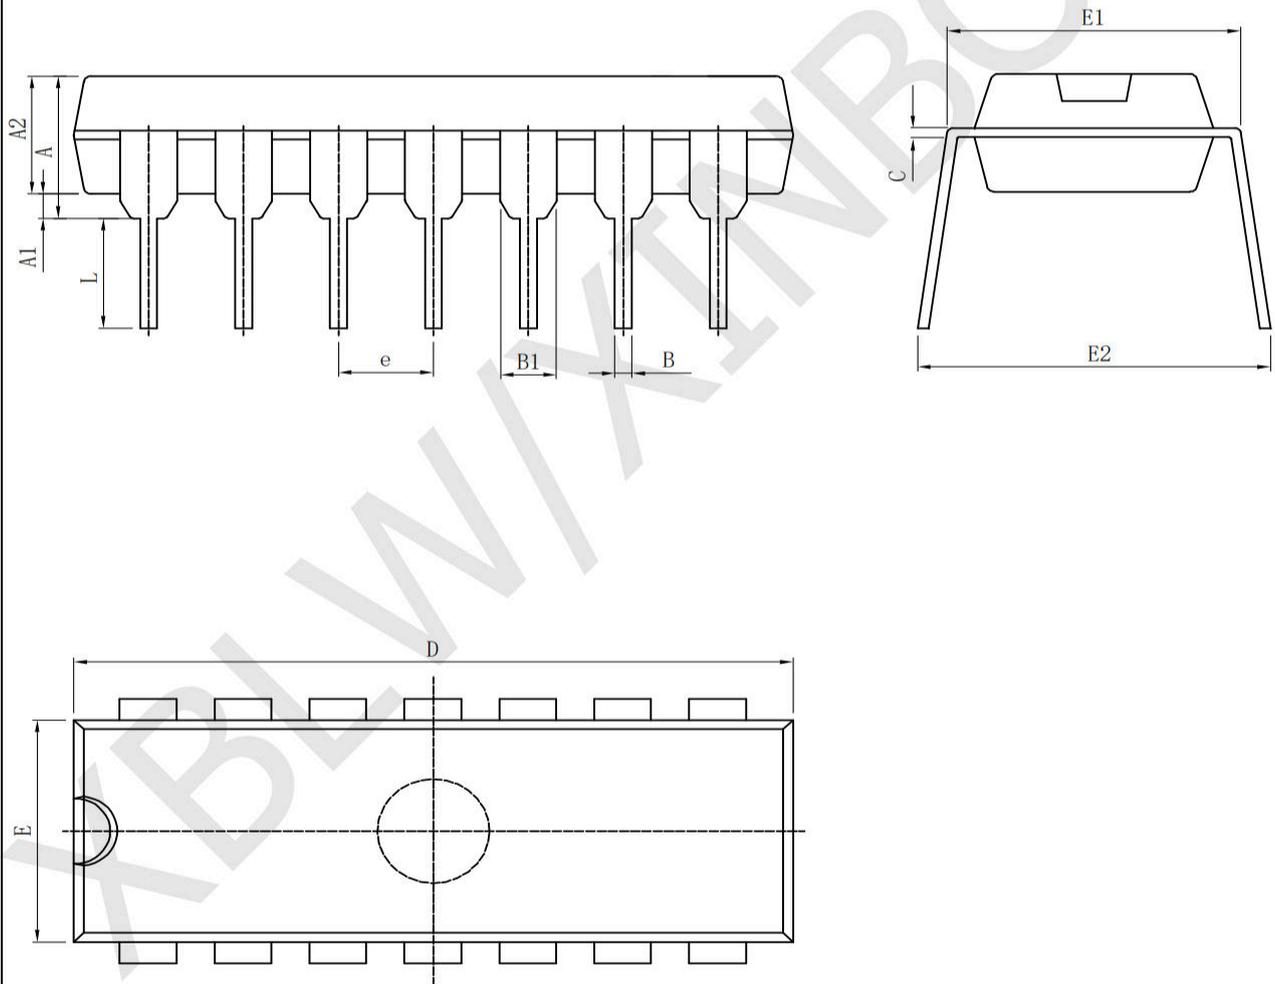


· SOP-14

Size Symbol	Dimensions In Millimeters		Size Symbol	Dimensions In Inches	
	Min( mm)	Max( mm)		Min( in)	Max( in)
A	1.350	1.750	A	0.050	0.068
A1	0.100	0.250	A1	0.004	0.009
A2	1.100	1.650	A2	0.040	0.060
B	0.330	0.510	B	0.010	0.020
C	0.190	0.250	C	0.007	0.009
D	8.550	8.750	D	0.330	0.340
E	3.800	4.000	E	0.150	0.150
e	1.27		e	0.05	
H	5.800	6.200	H	0.220	0.240
h	0.250	0.500	h	0.009	0.020
L	0.400	1.270	L	0.015	0.050
k	8° (max)		k	8° (max)	

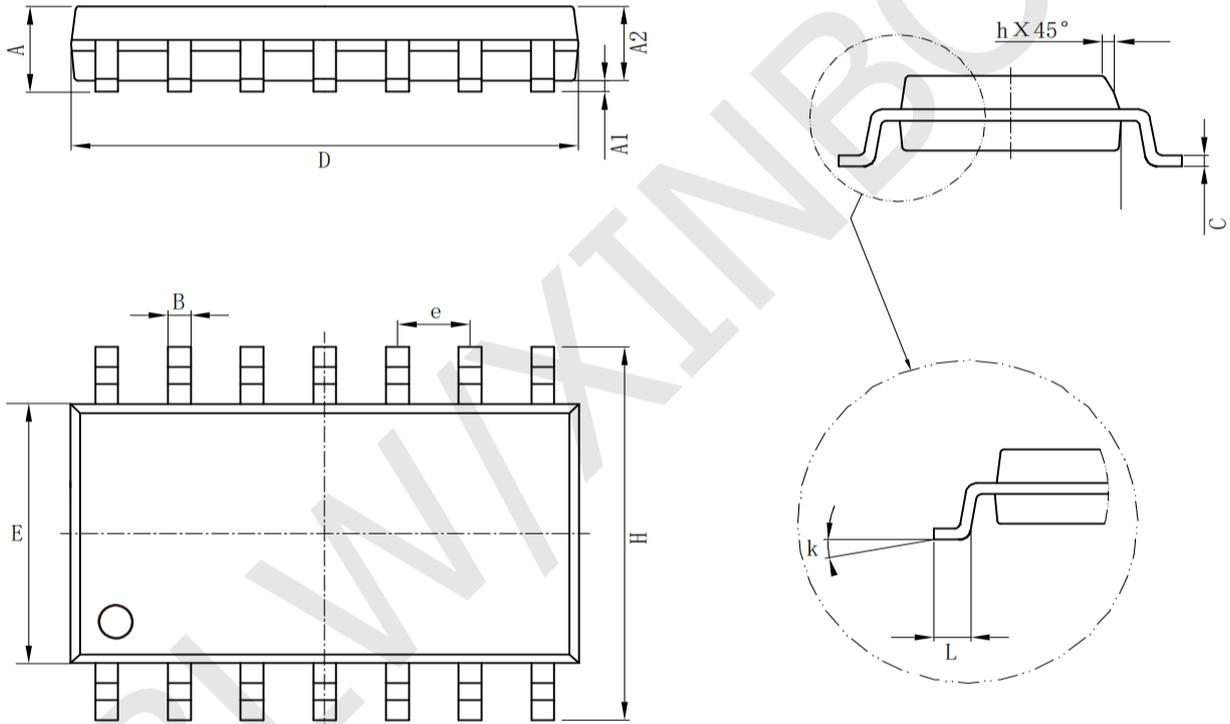

TSSOP-14

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Inches	
	Min (mm)	Max (mm)		Min (in)	Max (in)
A		1.200	A		0.047
A1	0.050	0.150	A1	0.002	0.006
A2	0.800	1.050	A2	0.031	0.041
b	0.190	0.300	b	0.007	0.012
c	0.090	0.200	c	0.004	0.0089
D	4.900	5.100	D	0.193	0.201
E	6.200	6.600	E	0.244	0.260
E1	4.300	4.500	E1	0.169	0.176
e	0.65		e	0.0256	
L	0.450	0.750	L	0.018	0.030
L1	1.00		L1	0.039	
k	0°	8°	k	0°	8°

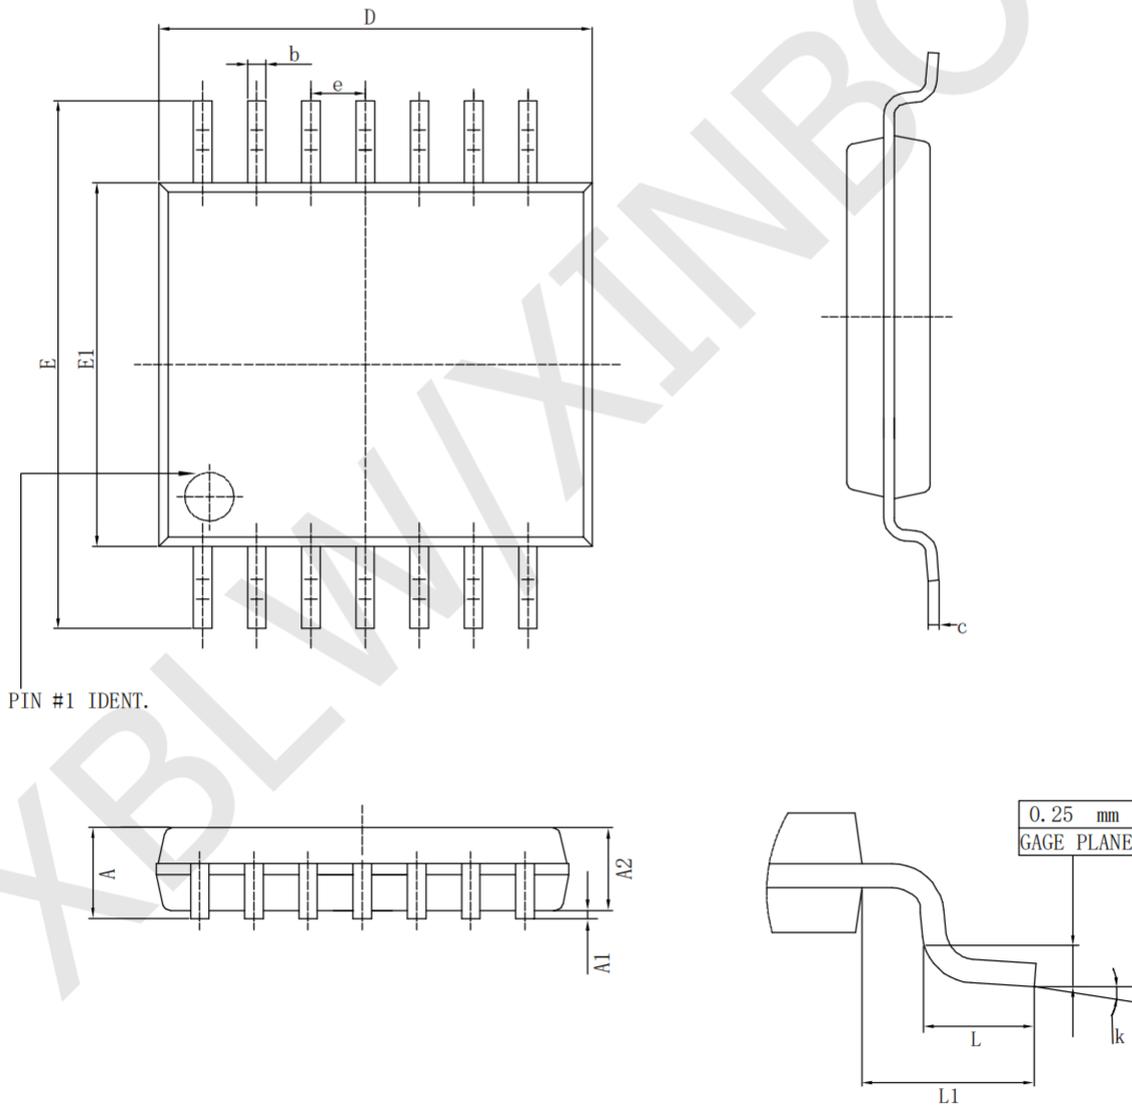

## Statement:

- XBLW reserves the right to modify the product manual without prior notice! Before placing an order, customers need to confirm whether the obtained information is the latest version and verify the completeness of the relevant information.
- Any semi-guide product is subject to failure or malfunction under specified conditions. It is the buyer's responsibility to comply with safety standards when using XBLW products for system design and whole machine manufacturing. And take the appropriate safety measures to avoid the potential in the risk of loss of personal injury or loss of property situation!
- XBLW products have not been licensed for life support, military, and aerospace applications, and therefore XBLW is not responsible for any consequences arising from the use of this product in these areas.
- If any or all XBLW products (including technical data, services) described or contained in this document are subject to any applicable local export control laws and regulations, they may not be exported without an export license from the relevant authorities in accordance with such laws.
- The specifications of any and all XBLW products described or contained in this document specify the performance, characteristics, and functionality of said products in their standalone state, but do not guarantee the performance, characteristics, and functionality of said products installed in Customer's products or equipment. In order to verify symptoms and conditions that cannot be evaluated in a standalone device, the Customer should ultimately evaluate and test the device installed in the Customer's product device.
- XBLW documentation is only allowed to be copied without any alteration of the content and with the relevant authorization. XBLW assumes no responsibility or liability for altered documents.
- XBLW is committed to becoming the preferred semiconductor brand for customers, and XBLW will strive to provide customers with better performance and better quality products.