

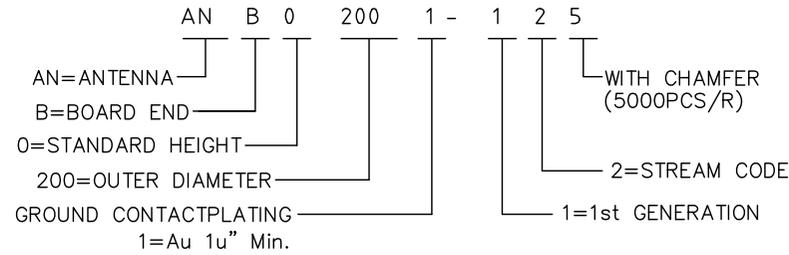


Kinghelm®

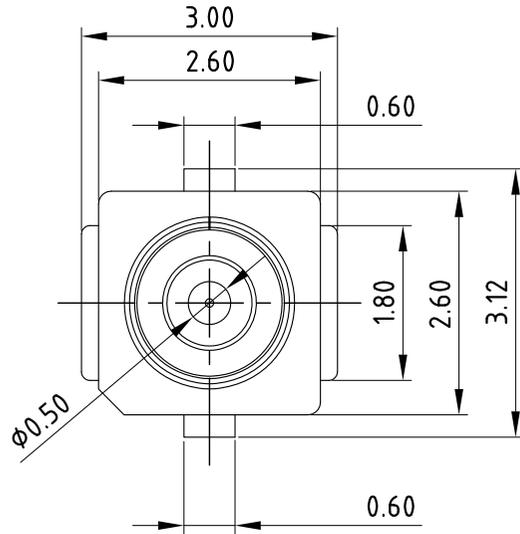



NOTES:

- FREQUENCY RANGE:
DC TO 6GHZ (VSWR: 1.3MAX AT 0.1~3GHZ, 1.4MAX AT 3~6GHZ)
- CHARACTERISTIC IMPEDANCE: 50Ω(NOMINAL);
- TEMPERATURE: -40°C TO +90°C;
- RATED VOLTAGE : 60VAC;
- CONTACT RESISTANCE :
20mΩ MAX.(SIGNAL CONTACT)
20mΩ MAX.(GROUND CONTACT)
- WITHSTAND VOLTAGE : 200VAC FOR 1 MINUTE MIN;
- INSULATION RESISTANCE : 500MΩ MIN. AT 100VDC;
- THIS COMPONENT IS HALOGEN FREE.

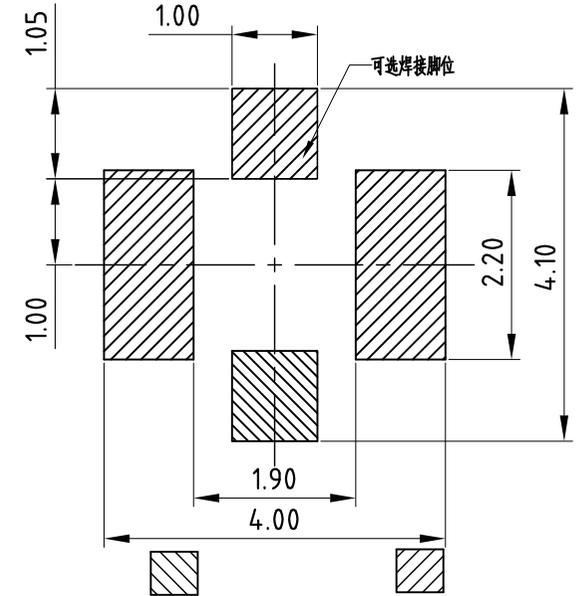

SIGNAL CONTACT GROUND CONTACT

P.C.B DIMENSION (TOP VIEW)
(TOLLERRANCE ±0.05)

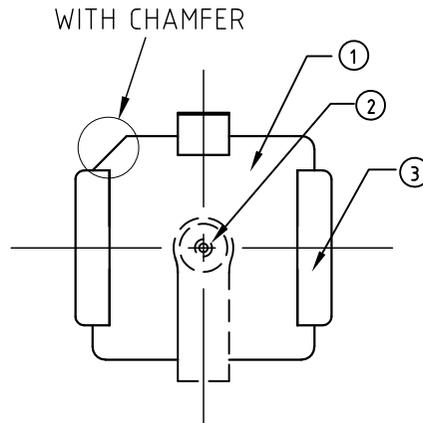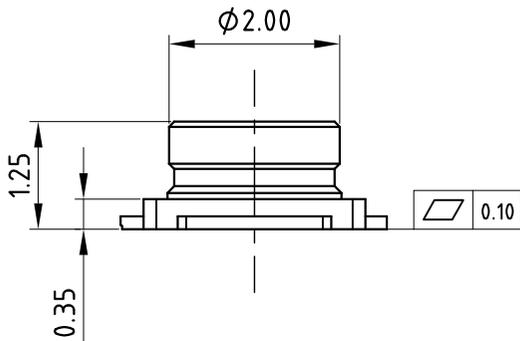


SCHEMATIC



ITEM	NAME	Q'TY	MATERIAL	FINISH
3	GROUND CONTACT	1	COPPER ALLOY	GOLD FLASH OVER Ni PLATED OVERALL.
2	CONTACT	1	COPPER ALLOY	GOLD FLASH OVER Ni PLATED OVERALL.
1	HOUSING	1	THERMOPLASTIC	UL94V-0

TOLERANCES UNLESS OTHERWISE SPECIFIED

X.	±0.25	X.°	±2°
.X	±0.20	.X°	±1°
.XX	±0.15	.XX°	±0.5°



技术详询

TOLERANCES UNLESS OTHERWISE SPECIFIED		深圳市金航标电子有限公司	WWW.BDS866.COM
		KH-IPEX-K501-29	0755-83044319
SERIES: RF 1G BOARD END		TITLE: RF 1G H TYPE BOARD END	
APPD: 王宁 2018/07/09		PART No.: ANB02001-125	
CKD: 段国强 2018/07/09		DWG No.: 307-0000-0193	
DR: 段国强 2018/07/09		UNITS	MAT'L
		FINISH	SCALE
		SHEET	REV.
		MM	N/A
		N/A	1:1
		1/1	A